


VANGUARD RL-C BED BAR



Contents . Contenu . Contenido

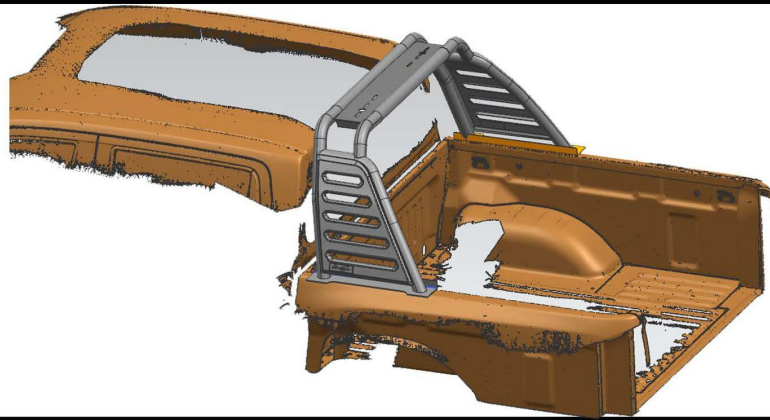

main body 2X
(bilateral symmetry)



Cross bar I 2X



E 2X



Irregular gasket 4X



IX



M10*30 6X



M10 6X



M8*20 8X



M8 8X



M8*30 2X



M8 2X



M10 1X




M10 6X

1




Push the holster aside first.

2

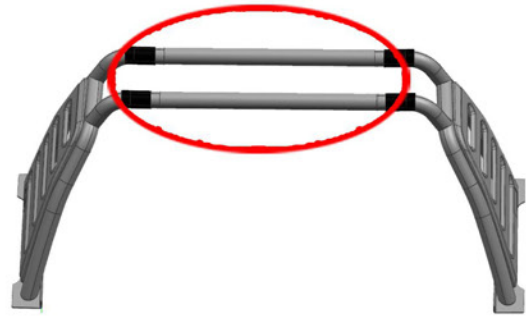

Install the two crossbars.

3

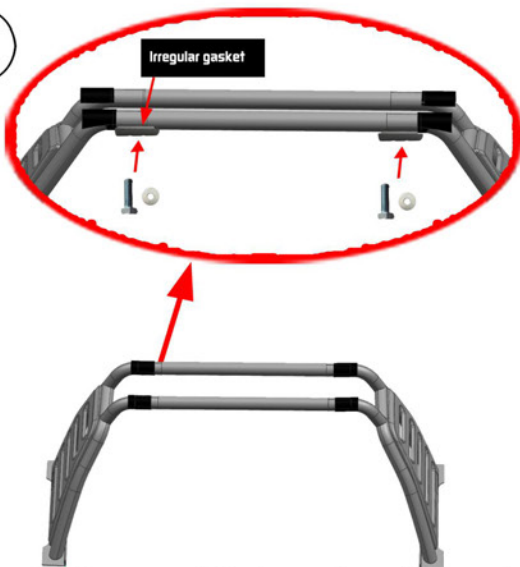

Then, put four special-shaped gaskets under the pipe, align the holes, and fix them with M8*20 screw gaskets. Finally, push the hose to the middle position.

4



Put the baffle in the middle position as shown in the figure.

5




Push the holster aside first.

6



Then, put two E drawings on the bottom of the product, align the hole positions, and then fix them with m8*30 hexagon nuts and gaskets from the top of the product, and tighten the nuts.

7

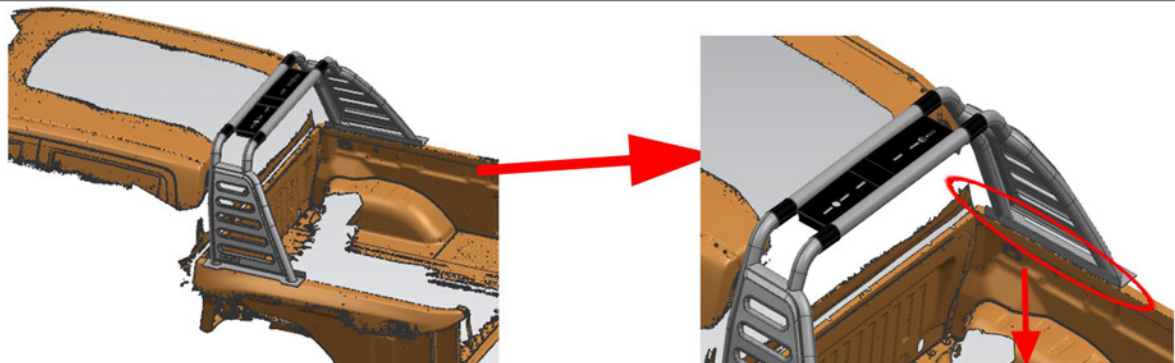

Mark hole

Put the installed products in the front of the carriage, as shown in the figure.
After alignment, punch holes at the marked holes, and enlarge the holes to M10.
Then put Ram into the holes with a Ram device, and then put the products up again.
After alignment, fix them with M10 *30 screws, washers and nuts, and pay attention to tightening them.